FOUNDATION NOTES:

1. 4" DIA. PERF. INTER. PERIMETER DRAIN SET IN MIN. 10" OF CLEAN CRUSHED STONE TO ALLOW FOR FUTURE SUB-SLAB VENTILATION IF REQUIRED.
2. ALL COLUMNS TO BE STOCK CONC. FILLED LALLY COLUMNS.
3. ALL INTERIOR FOOTINGS ASSUMED TO BE 10" DEEP FOOTINGS
4. DECK SUPPORTS TO BE 12" DIA. SONOTUBES SET FLUSH W/FINISH GRADE AT TOP OR PER CONT.
5. CONTRACTOR TO VERIFY CONDITIONS IN FIELD AND STEP FND. AS REQUIRED PER GRADE.

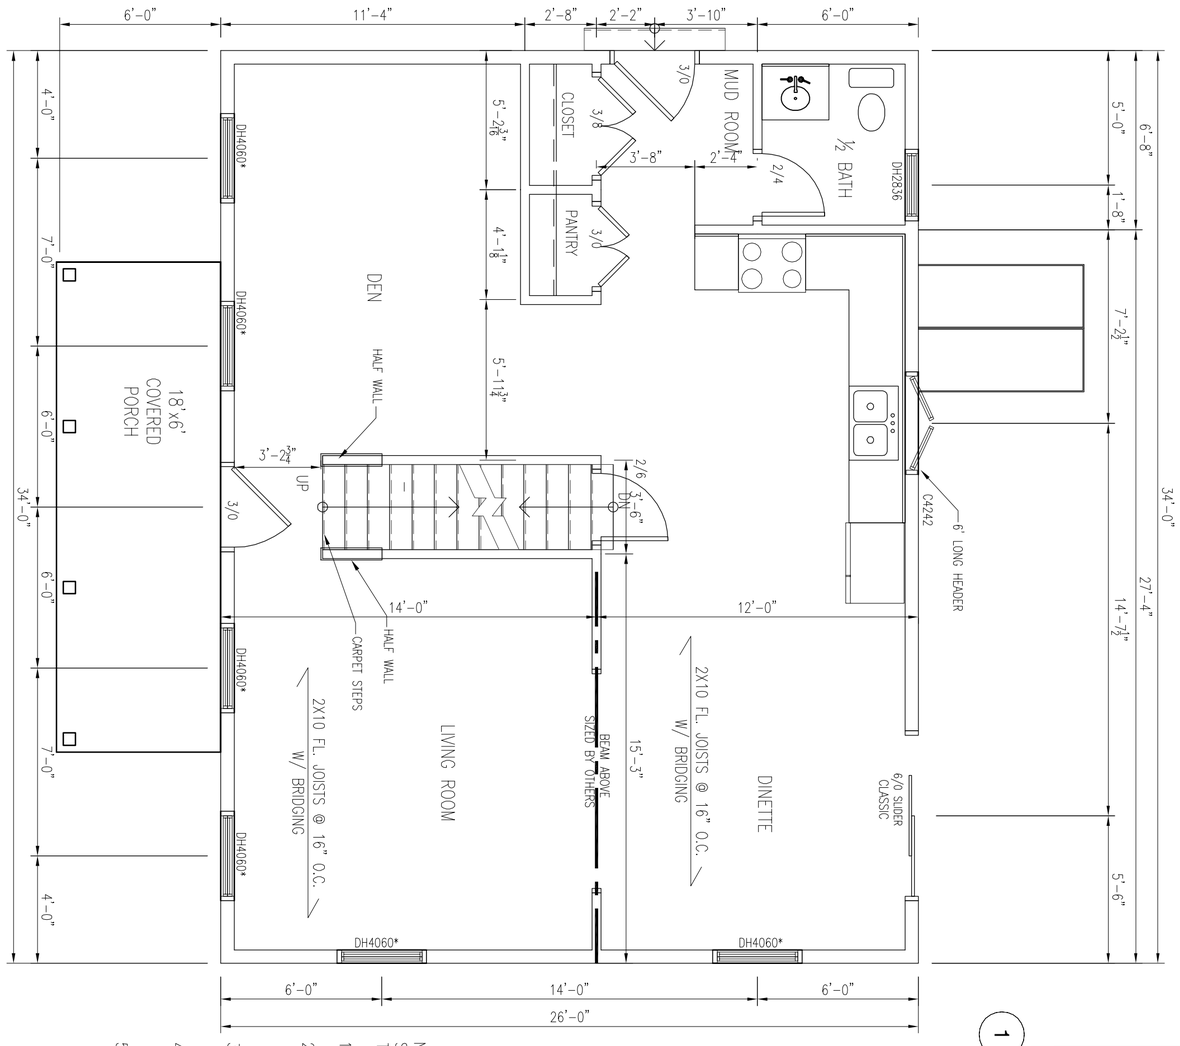

1 FIRST FLOOR PLAN
1/4"=1'-0"

NOTES:
SMOKE ALARMS SHALL BE INSTALLED IN THE FOLLOWING LOCATIONS

1. EACH SLEEPING AREA
2. OUTSIDE EACH SEPARATE SLEEPING AREA IN THE IMMEDIATE VICINITY OF THE BEDROOMS
3. ON EACH ADDITIONAL STORY OF THE DWELLING INCLUDING BASEMENTS
4. ALL SMOKE ALARMS SHALL BE INTERCONNECTED
5. * INDICATES EGRESS WINDOW

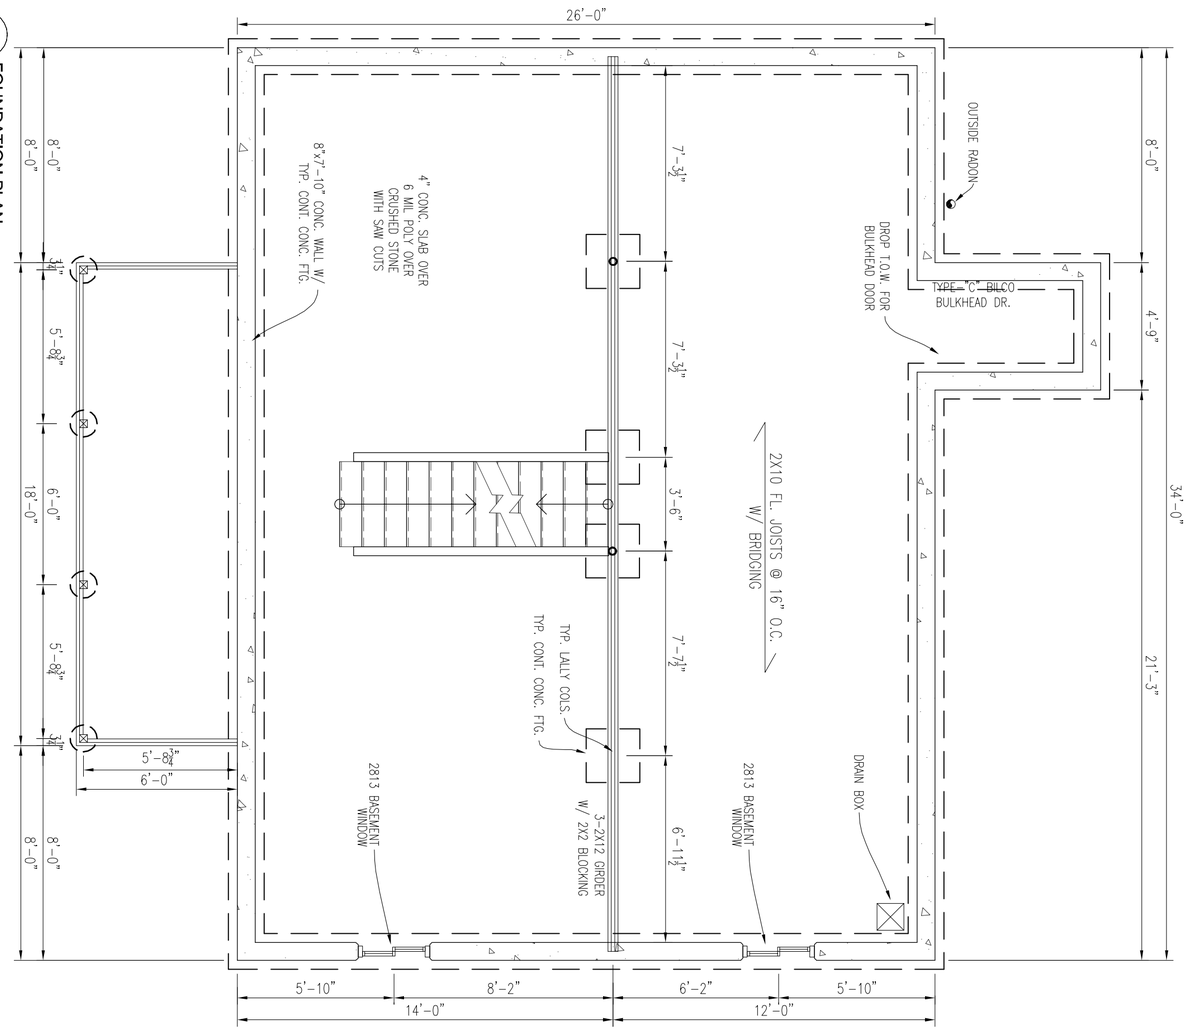

1 FOUNDATION PLAN
1/4"=1'-0"

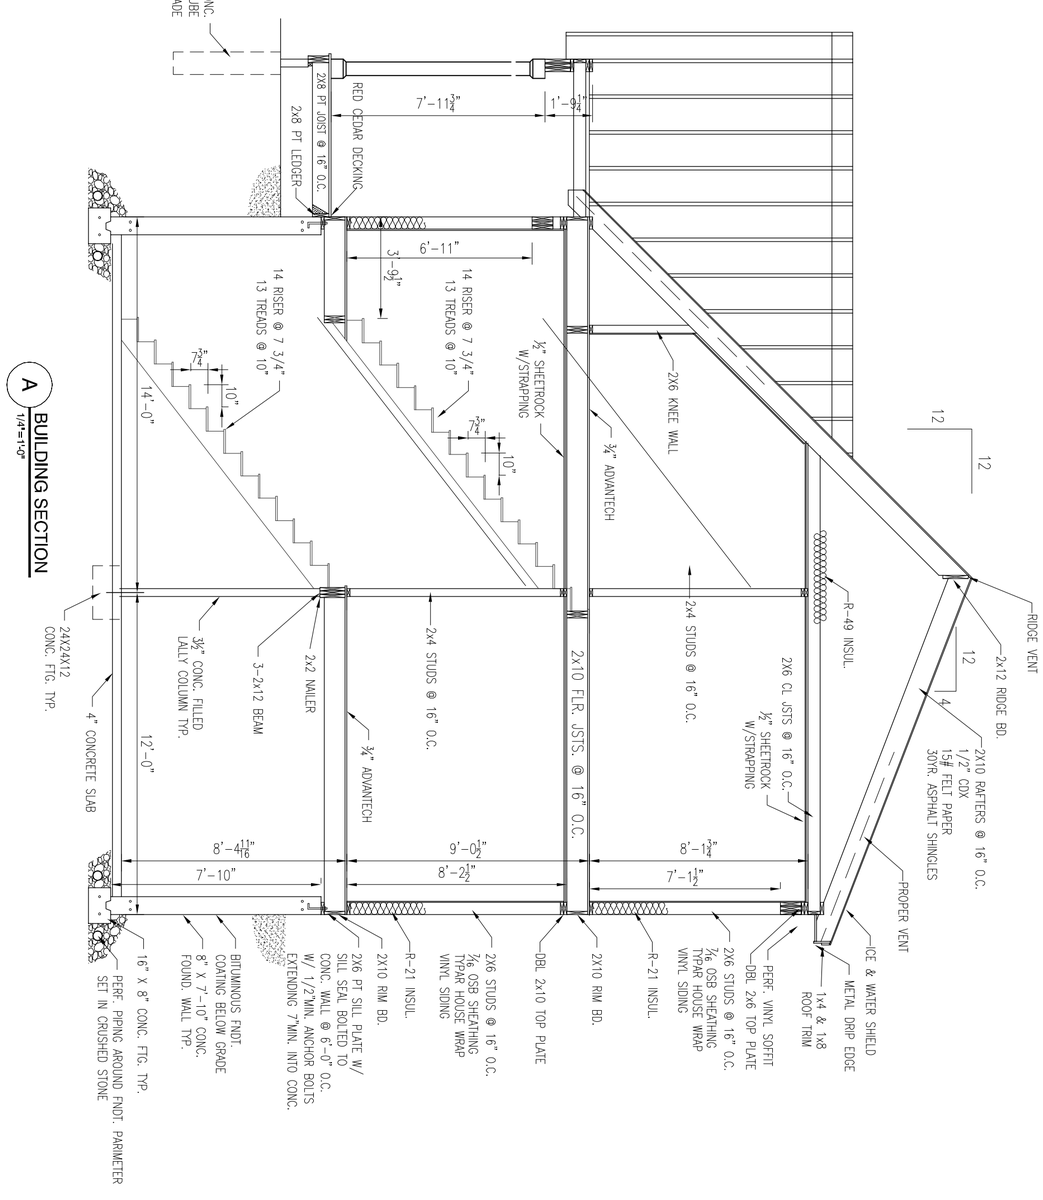

A BUILDING SECTION
1/4"=1'-0"

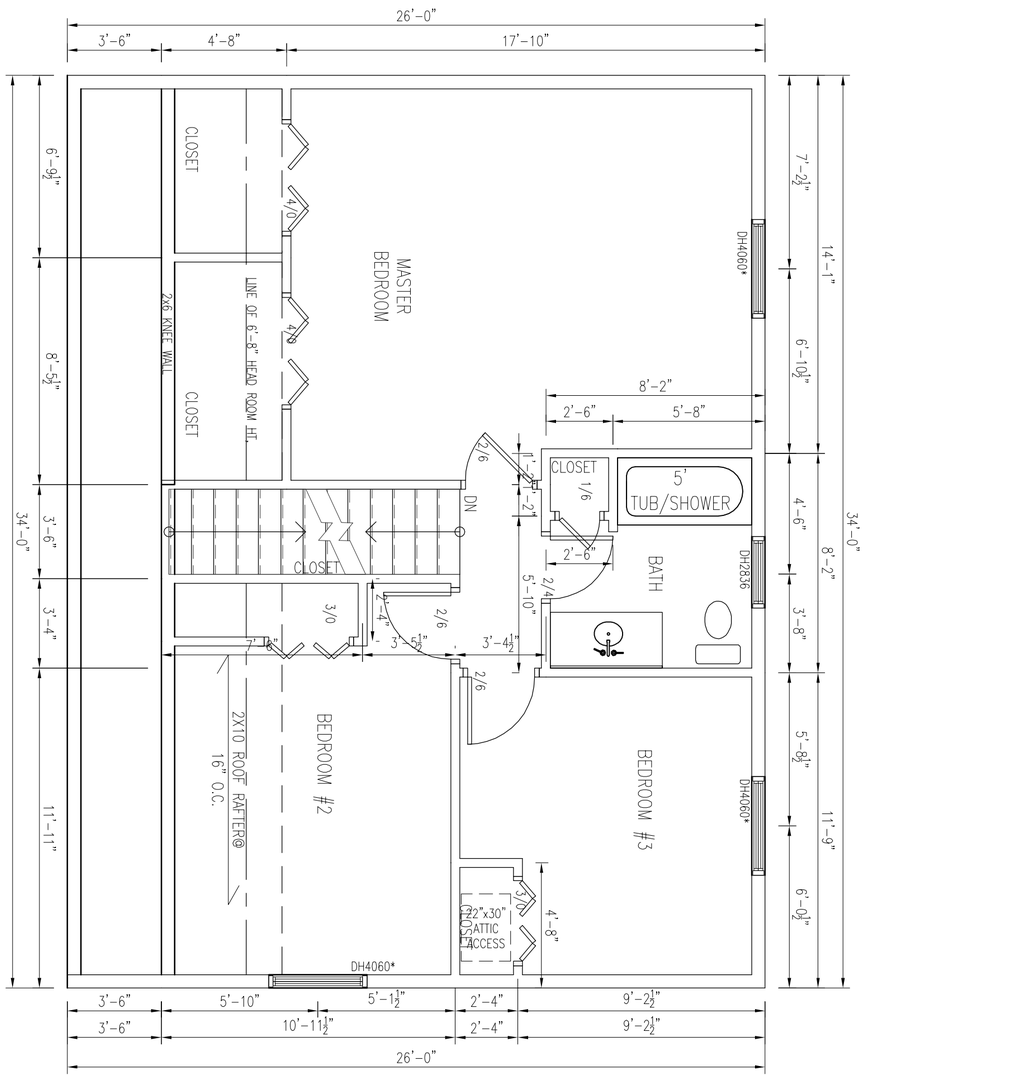

1 SECOND FLOOR PLAN
1/4"=1'-0"

Project	18-017
Date	3/5/18
Scale	1/4"=1'-0"
Sheet	A2

No.	Revision/Issue	Date
	6/30/18	
	6/14/18	
	6/10/18	

Drafter desinger

ROY ARCHITECTURAL DESIGN
99 PAVILION ROAD
CORNISH, ME. 04020
PHONE: 332-7716

DEVELOPER

SEAMAN'S CONSTRUCTION

FOUNDATION AND FIRST FLOOR SECOND FLOOR AND SECTION

CHURCH STREER VERSION 1

THE DESIGNERS OF ROY ARCHITECTURAL DESIGN ARE NOT ARCHITECTS, AND OR ENGINEERS. THE DRAWINGS ARE PROVIDED FOR GENERAL INFORMATIONAL PURPOSES ONLY AND HAVE NOT BEEN REVIEWED OR APPROVED BY A LICENSED ARCHITECT OR PROFESSIONAL ENGINEER. UNLESS OTHERWISE INSTRUCTED, ROY ARCHITECTURAL DESIGN WILL BUILD THE PROJECT IN ACCORDANCE WITH THESE CONCEPTUAL DRAWINGS. ALL CONTRACTORS AND SUBCONTRACTORS ARE TO FOLLOW LOCAL CODES AND BUILDING PRACTICES. TOP OF WALL HEIGHT MAY VARY PER SITE CONDITIONS. ALL SITE CONDITIONS ARE TO BE FIELD VERIFIED PER ON SITE CONDITIONS. NO WARRANTIES ARE MADE WITH REGARD TO THESE CONCEPTUAL DRAWINGS.

PDF Created with deskPDF PDF Writer - Trial :: http://www.docudesk.com